

QD6

Tap and Go Smart POS




MasterCard TQM

payWave

paypass

EMVCO

expressPay

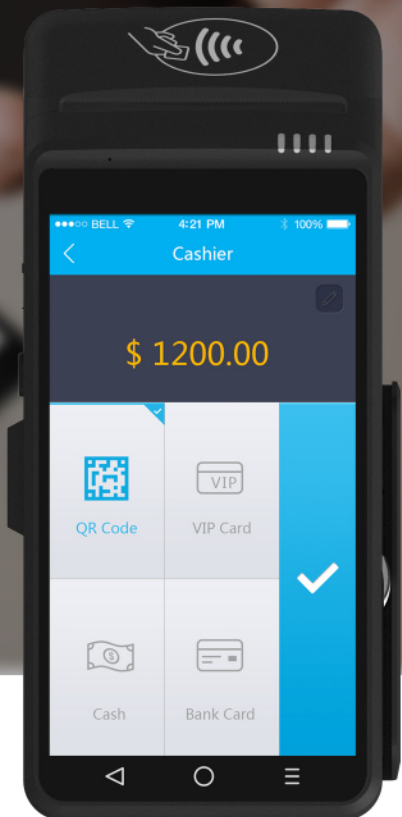

- Speedy and secure tap and go payment experience
- USB Type-A supports more accessories
- Ethernet module ensures stable network connectivity
- Handheld or countertop flexibility

WizarPOS, the trailblazer in Android POS terminal technology, is committed to empowering secure, future-proof, and scalable payment solutions worldwide.

QD6 Technical Specifications

Software Platform	Secure Android 7.1
Security	PCI PTS 5.0, SRED
Processor	Quad-Core @ 1.1GHz or 1.3GHz
Memory	1GB RAM, 8GB Flash or 2GB RAM, 16GB Flash
Display	5.5" multi-touch color LCD panel (720 x 1280 mm)
Printer	High-speed 58 mm thermal printer
Camera	5-megapixel camera with autofocus and flash
Contactless	ISO 14443 Type A & B, MIFARE, Sony Felica, Contactless EMV Level 1, MasterCard TQM, MasterCard PayPass, Visa payWave, American Express ExpressPay, Discover D-PAS, Anatel, Interac Flash L2, Rupay, MIR, Jspeedy
Chip Card	ISO 7816, EMV Level 1 & Level 2
MSR	ISO 7811, Track 1/2/3, bi-direction
Slots	1 SIM / 1 SAM, 1Micro SIM ,1 TF card (up to 64GB)
Communications	GSM, WCDMA, FDD-LTE, TDD-LTE, Wi-Fi, Bluetooth 4.0, USB2.0, Ethernet, e-SIM (optional)
Audio	Built-in microphone and speaker
Satellite	GPS, GLONASS
USB	Type A-USB OTG
Battery	10 hours per charge
Charging	5V 2A adapter, USB charging, and a charging cradle
Environmental	Operating temperature: -10°C ~ 50°C (14°F ~ 122°F) Storage temperature: -20°C ~ 70°C (-4°F ~ 158°F) Relative humidity (non-condense): 5% ~ 95%
Dimensions	188 x 85 x 69 mm (7.4 x 3.3 x 2.7 inches)
Weight	415 g (0.9 lb)

All features and specifications are subject to change without notice. Contact WizarPOS sales for more details.