

wizarPOS 1

Quick Installation Guide



V 1.0



POS Terminal



Power Cable



Power Adaptor



Antenna

WARNING:

- Do not disassemble the terminal, battery or AC adapter. Only qualified technicians may service the device.
- Do not use batteries, AC adaptors or terminals near water.


1

2

Top

Side

Bottom

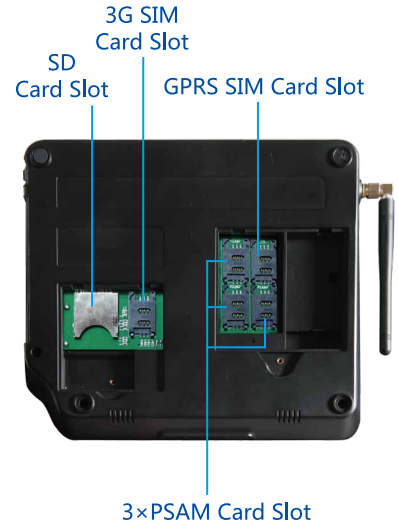

3

4

5


POWER ACCESS

Connect the power adapter to the power jack, and the other end to the 220V mains socket.


POS POWER ON

Press the "Power Switch" button to start the terminal.

1. Wait until the unlock screen shown as below:




2. Touch the lock icon, slide it to the unlock position shown as below:



1. Click the "⋮" button.



2. Click the "Setting" button.

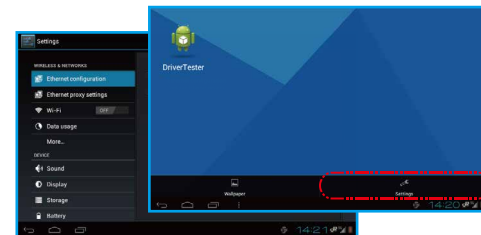

Operating Temperature:
0~40°C (+32° to 104°F)

Operating Humidity:
20~85%, no condensation

Storage Temperature:
-20~60°C (-4° to 140°F)

Storage Humidity:
10~90%, no condensation

400-880-4844

wizarPOS